PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D03D 11/00		(11) International Publication Number: WO 99/11851
	L	(43) International Publication Date: 11 March 1999 (11.03.99)
(21) International Application Number: PCT/NL: (22) International Filing Date: 29 August 1997 (2)		DK. ES. FI. FR. GB. GR. IF. IT LII MC NI PT SE
(71) Applicant (for all designated States except US): VINKEN BEHEER B.V. [NL/NL]; Voortsep NL-5081 ZK Hilvarenbeek (NL).	JEROE pad 6/	Published With international search report.
(71)(72) Applicant and Inventor: DE HAIR, Johannes, F Maria [NL/NL]; Willibrordlaan 23, NL-5096 BF (NL).	Henricu E Huls	
(72) Inventor; and (75) Inventor/Applicant (for US only): VINKEN, Jeroen, A Joannes, Maria [NL/NL]; Voortsepad 6A, NL-5 Hilvarenbeek (NL).	Adrianu 1081 ZI	
(74) Agent: IEMENSCHOT, J., A.; Van Exter Polak & C B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).	Charloui	

(54) Title: FABRIC WOVEN IN THE FORM OF A CLOTH

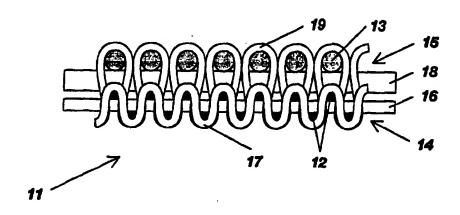

(57) Abstract

An improved fabric (11) consists of a so-called double cloth, formed by weaving tightly together, by means of binding warp threads (19), a lower cloth (14) consisting of weft threads (12) and warp threads (16, 17), and an upper cloth (15) consisting of weft threads (13) and warp threads (18, 19). The result is a compact and economically attractive fabric. In the form of covering material (carpet), the fabric has many possible designs and optional colour and material changes.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL AM AT AU BA BB BE BF BG BJ BR CA CF CG CH CI CM CN CU CZ DE DK EE	Albania Armenia Austria Austria Austria Azerbaijan Bosnia and Herzegovina Barbados Belgium Burkina Faso Bulgaria Benin Brazil Belarus Canada Central African Republic Congo Switzerland Côte d'Ivoire Cameroon China Cuba Czech Republic Germany Denmark Estonia	ES FI FR GA GB GE GH GN HU IE IL IS IT JP KE KG KP KR LC LI LK LR	Spain Finland France Gabon United Kingdom Georgia Ghana Guinea Greece Hungary Ireland Israel Iceland Italy Japan Kenya Kyrgyzstan Democratic People's Republic of Korea Republic of Korea Kazakstan Saint Lucia Liechtenstein Sri Lanka Liberia	LS LT LU LV MC MD MG MK ML MN MR MV MX NE NL NO NZ PL PT RO RU SD SE SG	Lesotho Lithuania Luxembourg Larvia Monaco Republic of Moldova Madagascar The former Yugoslav Republic of Macedonia Mali Mongolia Mauritania Malawi Mexico Niger Netherlands Norway New Zealand Poland Portugal Romania Russiam Federation Sudan Sweden Singapore	SI SK SN SZ TD TG TJ TM TR TT UA UG US UZ VN YU ZW	Slovenia Slovenia Slovakia Senegal Swaziland Chad Togo Tajikistan Turkmenistan Turkey Trinidad and Tobago Ukraine Uganda United States of America Uzbekistan Viet Nam Yugoslavia Zimbabwe
--	--	---	---	---	---	--	---

Fabric woven in the form of a cloth.

The invention relates to a fabric woven in the form of a cloth, which is designed as a double-cloth structure, comprising a lower cloth and an upper cloth, both woven with a system of warp and weft threads, the lower cloth and upper cloth being joined together by means of binding warp threads.

Fabrics are known in the form of carpet, comprising a base or lower cloth on which a so-called pile covering is arranged by means of various techniques. The carpet is a single cloth, with a looped or cut pile connected to and therefore anchored on the base cloth.

An exception to this is formed by flat-cloth carpet designs made from coir, sisal, paper, wool and the like, the design consisting solely of warp and weft threads of this type of fibre. However, these are always single-cloth designs.

In carpet designs, a pile covering is formed on the so-called base cloth in the longitudinal direction of the carpet by utilizing various techniques, such as tufting, weaving, sticking, knitting and the like.

This design method entails limitations to the shaping or patterning of the visible side:

25

30

- All effects must be produced by the longitudinal direction. In short-piled designs, these limitations are extremely obvious.
- There are frequently problems in sufficiently covering the base cloth, since the weft threads of the base cloth also have to bind in the pile threads and thus these binding points remain visible, which is not always acceptable.
- Covering these binding points always entails a higher pile weight.
- This higher pile weight also leads to higher material costs.
- Only limited dimensional stability can be achieved in the existing flat-cloth carpet designs.

5

- 2 -

Due to the fact that the pile thread forms the colour and thus also the pattern of the visible side and a large number of adjacent threads have to be taken from the longitudinal direction, a change in colour involves considerable effort. Therefore, economic aspects dictate that large production series be used, in order to keep the costs of changing to a new colour or a different pattern as low as possible. This in turn has a disadvantageous effect on stock-keeping.

The existing, known carpet designs are saddled with the abovementioned drawbacks.

A fabric of the type mentioned at the outset is known from Dutch Patent No. 21413, in particular Fig. 4.

In this known fabric in the form of covering

15 material, a base or backing is woven to a two-sided fabric, for which purpose warp threads are present to which jute weft threads are fixed by means of binding warp threads which run over the weft threads of the two-sided fabric which are situated on the side of the backing. The weft threads of the two-sided fabric are chenille threads. The known covering material is used in the form of chenille carpets, rugs and upholstery fabrics.

The object of the present invention is to provide an improved fabric with a very stable lower cloth, the upper cloth and the lower cloth being joined together in a firm and robust manner.

This object is achieved according to the invention in that the fabric is designed as a flat cloth and in that the binding warp threads of the upper cloth also extend through the lower cloth and, at the top side and the underside of the fabric, run respectively over the weft threads of the upper cloth and under the weft threads of the lower cloth.

Preferably, both the warp thread system and the
35 weft thread system comprise a plurality of thread systems,
the warp thread system preferably comprising at least four
thread systems.

Advantageously, the warp threads and the weft threads of at least the upper cloth consist of wear-

resistant material, so that the fabric can be used in circumstances where it is subject to considerable load.

Expediently, synthetic fibres, preferably polypropylene fibres, are used for the warp threads and the weft threads.

Natural fibres, such as horse-hair, may also be used for the warp threads and the weft threads.

The invention is explained in more detail in the following exemplary embodiment with reference to the drawing, in which:

Fig. 1 shows the weft cross-section of a known fabric in the form of covering material (carpet) with the looped-pile design;

Fig. 2 shows the weft cross-section of a known 15 fabric in the form of covering material (carpet) with the cut-pile design;

Fig. 3 shows the weft cross-section of a known fabric in the form of covering material (carpet) using the single-cloth design;

Fig. 4 shows the weft cross-section of a fabric according to the present invention; and

Fig. 5 shows the warp cross-section of the fabric of Fig. 4.

Fig. 1 shows the weft cross-section of a known covering material (carpet) 1 with the looped-pile design. The (base) cloth consists of filling warp threads 2, weft threads 3, binding warp threads 4, and pile threads 5.

Fig. 2 shows the weft cross-section of the covering material (carpet) 1 of Fig. 1, but with the pile threads 5 cut open at 6, resulting in the known cut-pile design.

Fig. 3 shows the weft cross-section of a known flat-cloth carpet design 7, in which the carpet design consists solely of warp threads 8 and 9 and weft threads 10. The types of thread used for this are, for example, 35 coir, sisal, paper, wool and the like.

Fig. 4 shows a double-cloth fabric 11 in accordance with the invention, sectioned through the weft threads 12 and 13 of the lower cloth 14 and upper cloth 15, respectively. In addition to the weft threads 12, the lower cloth

14 contains filling warp threads 16 and binding warp threads 17. The upper cloth 15 furthermore comprises pile warp threads 18 and 19, the pile warp threads 19 firmly joining the upper cloth 15 to the lower cloth 14, due to the fact that these pile warp threads 19 also extend through the lower cloth 14 and at the underside of the lower cloth 14 run beneath the weft threads 12.

Fig. 5 shows the double-cloth fabric 11 according to the invention, sectioned through the warp threads 16,

10 17, 18 and 19. It can be seen in this figure that the overall fabric is woven together in a very firm and compact manner.

This design provides fabric according to the present invention which is designed as covering material or carpet with a large number of advantages over conventional carpet designs, such as:

- a reduction in the weight of thread material of up to 20 to 30%, owing to the more compact flat weaving,
- a greater stability,
- 20 it is possible to use a different material,
 - a greater range of variations in patterning,
 - the carpet is easier to maintain,
 - it combines a number of favourable characteristics of hard floors with a number of favourable charac-
- 25 teristics of carpet.

These favourable characteristics include:

- minimal roll resistance, as with hard floors,
- anti-slip properties of carpet,
- favourable acoustic qualities of carpet (greater sound
 absorption),
 - easy to sweep clean like hard floors,
 - resistant to moisture and therefore readily usable in damp rooms, like hard floors.

So-called rods may be used in the upper layer of
the fabric according to the invention. The advantage of
doing so in the covering material(carpet) is that extra
emphasis is possible by means of an open pile of the said
upper cloth.

In the fabric according to the invention, both the

10

35

warp system 16, 17, 18, 19 and the weft system 12, 13 comprise a plurality of thread systems, the warp thread system 16, 17, 18, 19 preferably comprising at least four thread systems. Particularly in covering material, this has the advantage that the colour-determining threads can be used as far as possible for selection in the transverse (weft) direction. It is then possible:

- quickly to change colour and thus to work with production series of minimal size, or even orderlinked production series; in this way the stock can be considerably limited,
- to extend the patterning possibilities with weft effect.

In preferred embodiments of the fabric according to the invention:

- the warp thread system 18, 19 and weft thread system
 13 of at least the upper cloth 15 consist of very
 wear-resistant material,
- synthetic fibres are used for the warp threads 16, 17,
 18, 19 and weft threads 12, 13, and
 - polypropylene is used for the said synthetic fibres.

The advantages of carpet designed in this manner are that a very stable and wear-resistant carpet is produced, to which dirt does not stick, which is easy to clean and over which it is easy to roll or slide, for example on office chairs. The carpet is preferably designed as a wall-to-wall carpet.

Due to the particular features of the fabric according to the invention, it is also very suitable for use in conveyor belts, as a geotextile (for example as a reinforcement in road building and dyke building), in protective material (for example bullet-proof vests) or other industrial applications where the particular properties of the fabric provide an advantage.

Finally, it should be expressly emphasized that a preferred embodiment of the fabric according to the invention is described above and that with further modification variations in the binding with regard to patterning are possible without departing from the

protective scope of the patent.


CLAIMS


- 1. Fabric woven in the form of a cloth, which is designed as a double-cloth structure, comprising a lower cloth and an upper cloth, both woven with a system of warp and weft threads, the lower cloth and upper cloth being
- joined together by means of binding warp threads, characterized in that the fabric is designed as a flat cloth and in that the binding warp threads (19) of the upper cloth (15) also extend through the lower cloth (14) and, at the top side and the underside of the fabric, run
- respectively over the weft threads (13) of the upper cloth (15) and under the weft threads (12) of the lower cloth (14).
 - 2. Fabric according to claim 1, characterized in that both the warp thread system (16, 17, 18, 19) and the weft
- 15 thread system (12, 13) comprise a plurality of thread systems.
 - 3. Fabric according to claim 2, characterized in that the warp thread system (16, 17, 18, 19) comprises at least four thread systems.
- 20 4. Fabric according to one of claims 1 3, characterized in that the warp threads (18, 19) and weft threads (13) of at least the upper cloth (15) consist of wear-resistant material.
 - 5. Fabric according to one of claims 1 4, charac-
- 25 terized in that synthetic fibres are used for the warp threads (16, 17, 18, 19) and the weft threads (12, 13).
 - 6. Fabric according to claim 5, characterized in that polypropylene is used for the synthetic fibres.
 - 7. Fabric according to one of claims 1 4, charac-
- 30 terized in that natural fibres are used for the warp threads (16, 17, 18, 19) and the weft threads (12, 13).
 - 8. Fabric according to claim 7, characterized in that horse-hair is used.
 - 9. Fabric according to one of the preceding claims,
- designed as covering material, in particular for covering floors, walls, furniture and the like.
 - Fabric according to one of the preceding claims

- 8 -


used in conveyor-belt material.


- 11. Fabric according to one of the preceding claims used as geotextile.
- 12. Fabric according to one of the preceding claims5 used in protective material.

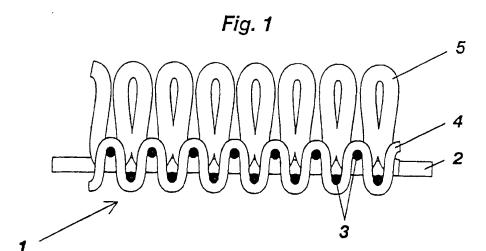


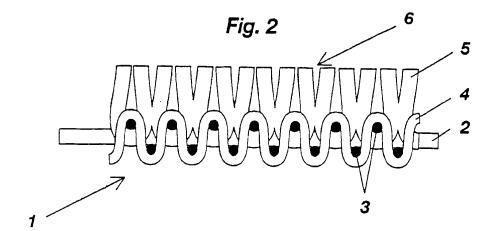



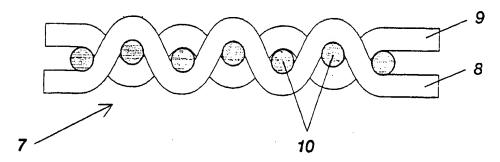

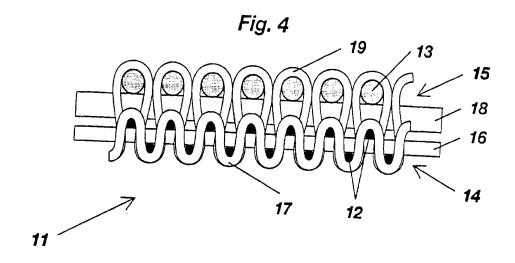

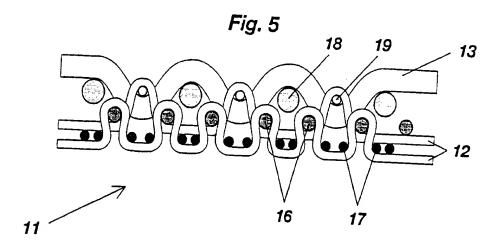

INTERNATIONAL SEARCH REPORT

Inter nal Application No

A. C	LASSIFICATION OF SUB-		PCT/NL 97/00492
A. CLASSIFICATION OF SUBJECT MATTER IPC 6 D03D11/00 PCT,			101/ML 9//00492
Accor	ding to International Patent Classification(IPC) or to both nat	lional dessitication	
Minim	ELDS SEARCHED	described and IPC	
IPC	um documentation searched (classification system followed 6 D03D	by classification symbols)	
L			
Docum	nentation searched other than minimum documentation to the		
	sentation searched other than minimum documentation to the	extent that such documents are include	d in the fields searched
1			
	nic data base consulted during the international search (nam	e of data base and, where practical see	arch tarms
		Francis, age	actiterms used)
C. DOCL	JMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate	of the sales	
4			Relevant to claim No.
А	NL 21 413 C (KONINKLIJKE VE	REENIGDE	
	TAPIJTFABRIEKEN) 15 February	y 1929	1-3
Α	application		
*1	NL 36 308 C (KONINKLIJKE VER	REENIGDE	
	TAPIJTFABRIEKEN) 15 April 19 see the whole document	935	1-3
Α			
	NL 48 729 C (KONINKLIJKE VER TAPIJTFABRIEKEN) 15 January see the whole document	EENIGDE	1.2
	see the whole document	1940	1-3
4	EP 0 508 332 A (SUBSECTION		
	EP 0 508 332 A (SUPERBA) 14 (see column 2, line 17 - line see abstract	October 1992	1,4-6
	see abstract	30; figure I	2,40
:	NL 1 002 750 C (VINKEN) 1 000		
E NL 1 002 750 C (VINKEN) 1 December 1997 see the whole document		ember 1997	1~9
Furthe	or documents and the		
necial and	er documents are listed in the continuation of box C.	X Patent family members	are listed in opposit
	gories of cited documents:		
consider	t defining the general state of the art which is not ed to be of particular relevance	"T" later document published after or priority date and not in co	or the international filing date inflict with the application but
filing data	current but published on or after the international	INVENTION	The armony unidenying the
which is o	which may throw doubts on priority claim(s) or cited to establish the publication date of another other special reason (as special)	"X" document of particular releva cannot be considered novel involve an inventive step wh	nce; the claimed invention or cannot be considered to
document	reter to establish the publication date of another rother special reason (as specified) referring to an oral disclosure, use, exhibition or ans	"Y" document of particular reteval	nce; the claimed invention
document.	published prior to the International filing date but the priority date claimed	GOCLEMANT is completed in	nce; the claimed invention live an inventive step when the one or more other such docu- ng obvious to a person skilled
	al completion of theinternational search	in the art. "&" document member of the sam	na abanda to a person skilled
		Date of mailing of the Internati	onal search report
	May 1998		
e and mailir	ng address of the ISA	05/06/1998	
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk	Authorized officer	
	Tel. (+31-70) 340-2040, Tx. 31 651 epo ni, Fax: (+31-70) 340-3016	Routeland	
T/ISA/210 (se	econd sheet) (July 1992)	Boutelegier,	

INTERNATIONAL SEARCH REPORT

Information on patent family members

ral Application No

		The state of the s	inbers	97/00492
Patent document cited in search report		Publication date	Patent family	 Publication
NL 21413	<u> </u>		member(s)	 date
NL 36308			NONE	
NL 30308	C 	·	NONE	
NL 48729	C		NONE	
EP 508332	 А	14-10-1992	NONE	
NL 1002750		02-10-1997		
		10-199/	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)